


Temp. logger w/PDF report (Interface: USB)



MI-LOGT1



MI-LOGT2

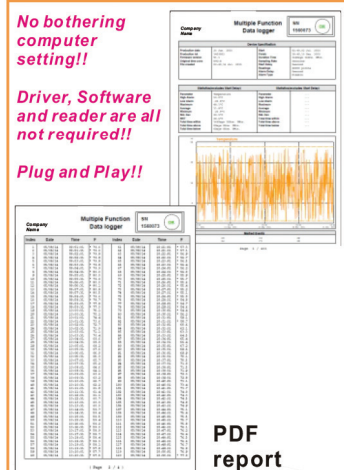

PDF report

- * Plug & Play temperature datalogger with USB 2.0 connector
- * Software & driver are not required for any operation
- * Automatically generate a PDF and Excel report while plugged into computer
- * High accuracy thermistor sensor
- * Completely programmable by users for maximum flexibility includes: 6 languages, sampling interval, start delay, alarm delay, unit, alarm range, alarm type, password and user name
- * Compact, light and IP67(MI-LOGT1) or IP65 (MI-LOGT2)
- * Big LCD provides excellent viewing experience
- * Count key to review max. & min value of logged data
- * Dual color LED provides instant status indicator: REC and High/Low temperature
- * Large memory capacity, 48000 readings.
- * Powered by 2pcs CR2032 battery. Easy replacement.
- * Mark key to provide 8 marking during transition period
- * One key operation to know leftover battery life time
- * PDF file contains summary, graph and detailed data list
- * EN12830 and RoHS compliance

Model	MI-LOGT1	MI-LOGT2
Temp. range	NTC thermistor, -30~70°C , -22~158°F	
Temp. resolution	0.1°C , 0.1°F	
Temp. Accuracy	+/-0.5°C	
Ext. Temp. range	NTC thermistor, -30~70°C , -22~158°F	
Ext. Temp. resolution	0.1°C , 0.1°F	
Ext. Temp. Accuracy	+/-0.5°C	
Sampling points	48000 readings	24000 Int. and 24000 Ext.
Meter size	110(L)*45(W)*17(T) mm	
Operating temp.	-30~70°C (Logging status); room temp.(PC mode)	
Operating RH%	Humidity < 90%	
Storage temp.	-40~85°C	
Storage RH%	Humidity < 90%	
Weight	~80g	
Battery	2PC 3.0V CR2032	
Sampling interval	30 seconds, 5, 10, 30, 60, 90, 120 minutes	
Start delay	0, 5, 30, 45, 60, 90, 120 minutes and 24 hours	
Alarm range	Programmable from -30 to 70°C	
Alarm delay	0, 5, 30, 45, 60, 90, 120 minutes	
Alarm type	Single Event, Cumulative, Disable	
Operation keys	3 Keys (Start/Stop key & Mark key & Count key)	
LED indicator	REC, High / Low alarm	
Standard package	Logger, manual, paper box	
Optional accessory	MI-T215 or MI-T22 external temp. Probe (for MI-LOGT2 only)	



EXTERNAL TEMP. PR
MI-T215
COLOR: BLACK
SIZE: 15CM PROBE W/HANDLE
CABLE: 116CM W/3.5MM JACK



EXTERNAL TEMP. P
MI-T22
COLOR: BLACK
SIZE: 2CM PROBE W/O HANDLE
CABLE: 200CM W/3.5MM JACK

2016.09 V3



Michshur S.Z. (1984) LTD.

8 Hagavish st., P.O.B. 1951 Holon 58117, Israel
Tel. 972-3-6508585 Fax. 972-3-6508586
Email: info@michshur.com www.michshur.com