

Standard Thermocouple Connectors

- Standard Cases of Color Coded Glass Filled Nylon
Temperature Rating of 350° F. (400° F. Max.)
- Hi-Temp Cases of Ryton R-4 (Brown Only)
Temperature Rating of 500° F. (550° F. Max.)
- Hollow Pins Rolled from .020" Sheet
- Solid Pins Machined from Solid Bar Stock
- Polarity and Calibration Marked
- Compatible with Similar Standard Connectors
- Knurled Finger Grips


Note: Specify "partial" if connectors are to be supplied without two nuts in the case without the two cover screws, with covers packed separately ready for installation of the cable clamps and tube adaptors. Specify "unassembled" if covers and screws are not installed, but packed separately.

PLUGS AND JACKS AVAILABLE

ANSI CALIB	CASE COLOR
TYPE J.....	BLACK
TYPE K.....	YELLOW
TYPE T.....	BLUE
TYPE R/S.....	GREEN
TYPE E.....	PURPLE
TYPE N.....	ORANGE
TYPE U (copper/copper)...	WHITE

Standard Plugs and Jacks

Accepts Standard Tube Adaptors, Cable Clamps, Adaptor Inserts, Braze Inserts, and Crimping Inserts

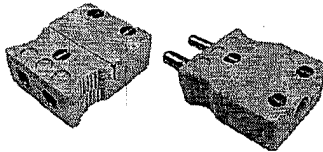


PART NUMBERS (Insert Calibration In Space After Number)

H10	(JKTRUEN) Plug w/Hollow Pins
H11	(JKTRUEN) Plug w/Solid Pins
H12	(JKTRUEN) Plug w/Hollow Pins & Hi-Temp Case
H13	(JKTRUEN) Plug w/Solid Pins & Hi-Temp Case
H20	(JKTRUEN) Jack
H22	(JKTRUEN) Jack w/Hi-Temp Case

3-Pin Plugs and Jacks

Accepts Standard Tube Adaptors, Cable Clamps, Adapter Inserts, Braze Inserts, and Crimping Inserts

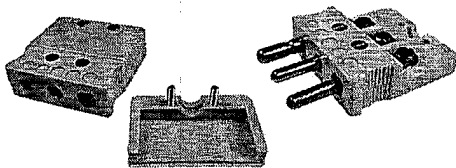


PART NUMBERS (Insert Calibration In Space After Number)

H16	(JKTRUE) Plug, Solid Pins
H17	(JKTRUE) Plug, 2 Hollow Pins
H25	(JKTRUE) Jack

Jab-In Plugs & Jacks

Cases of Glass Filled Nylon/ Pins and Sockets Machined from Solid Thermocouple Bar Stock/ Standard Units Accept Lead Wire to 14 Gauge/ Type K Units Available for 8 Gauge

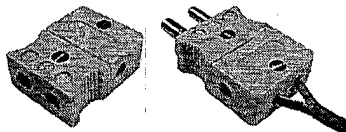

PART NUMBERS (Insert Calibration In Space After Number)

H14	(JKTRUE) Plug, Solid Pin
H14K-8-GA	Plug Type K, 8 gauge wire
H24	(JKTRUE) Jack
H24K-8-GA	Jack, Type K, 8 gauge wire